
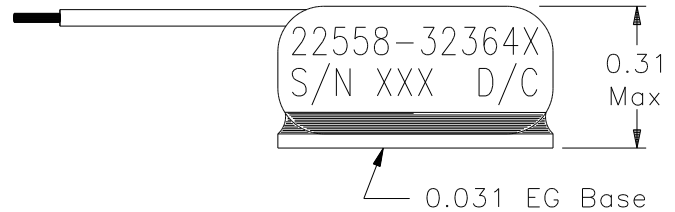


REVISIONS			
REV.	DESCRIPTION	DATE	BY

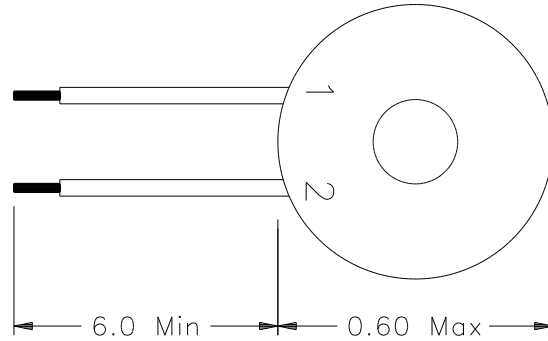

**Classification**

MIL-PRF-27 Grade: 6  
 MIL-PRF-27 Class: S (130° C)  
 Maximum Ambient Temperature: 105° C

**MIL-STD-981 Quality Assurance Provisions**

Class	Description	Drawing Number <sup>1</sup>
C	Commercial Parts	32364-30
B	Group A Inspection	32364-31B
E	Group A Inspection	32364-31S
S	Group A Inspection	32364-31S and
	Group B Inspection	32364-85

<sup>1</sup> The germane data will ship with the hardware.

**LOAD CONDITIONS**  
 E (1 - 2) = 2.0 V, 10kHz      P < 0.2 W

**Electrical Characteristics**

DC Resistance: (1 - 2) = 3.5 Ω Maximum

Volt-Seconds: (1 - 2) = 150 μV-S ± 1%, I<sub>pk</sub> = 20 mA, 10kHz (R<sub>s</sub> = 20Ω)

**These Parts Are Manufactured in Strict Compliance to MIL-STD-981.**

The "X" in the part number refers to the Quality Level (C, B, E, or S), see Quality Assurance Provisions above.	UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, and tolerances are:		<b>COAST/ACM</b>		
	Fractions	Decimals	Angles	<b>TITLE</b> <b>Timing Inductor</b>	
	±1/64	.X = ±0.1 .XX = ±0.02 .XXX = ±0.010	±5°	FSCM	DWG. NO
	DRAWN BY	DATE	22558	32364X	
DO NOT SCALE DRAWING	Jim Allen	04/03/03	SCALE: none	MAX. WT.: 4 grams	SHEET 1 OF 1