


REVISIONS			
REV.	DESCRIPTION	DATE	BY

Mark on Top:  
 White dot for Pin 1  
 22558-32090X  
 S/N XXX  
 Date Code

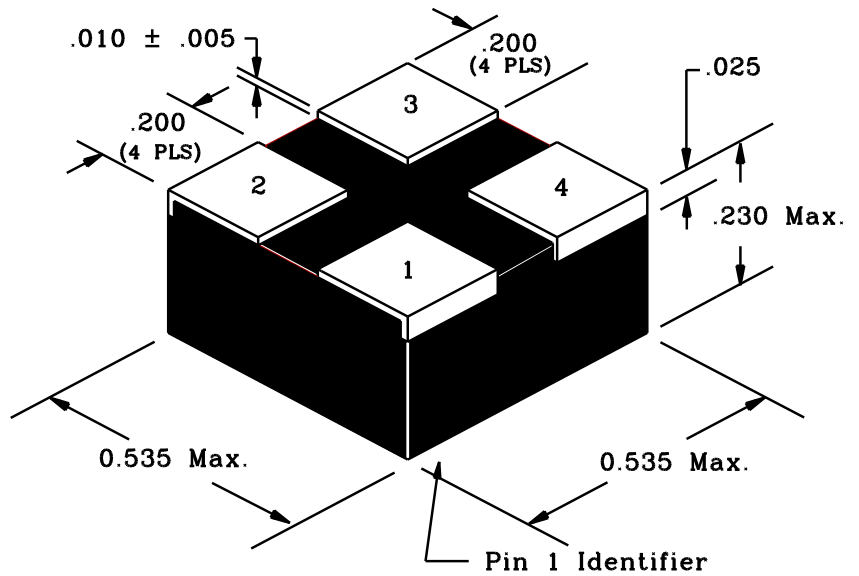

Coplanarity pad to pad is 0.003 max. (by design only, prior to solder coating, not inspectible).

Classification

MIL-PRF-27 Grade: 5  
 MIL-PRF-27 Class: S (130° C)  
 Maximum Ambient Temperature: 105° C

MIL-STD-981 Quality Assurance Provisions

Class	Description	Drawing Number
C	Commercial Parts	32090-30
B	Group A Inspection	32090-31B
E	Group A Inspection	32090-31S
S	Group A Inspection	32090-31S and
	Group B Inspection	32090-85

LOAD CONDITIONS

IDC (1 + 4) to (2 + 3) = 1.1 A  
 P<sub>TOTAL</sub> < 0.2 W

Electrical Characteristics

DC Resistance (1+4 - 2+3) = 12 mΩ Maximum

Inductance (measured at 0.1 V, 10 KHz):

(1+4 - 2+3) = 8.0 μH ± 10%, IDC = 0 A

(1+4 - 2+3) = 7.0 μH Minimum, IDC = 0.8 A

**These Parts Are Manufactured in Strict Compliance to MIL-STD-981.**

The "X" in the part number refers to the Quality Level (C, B, E, or S), see Quality Assurance Provisions above.	UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, and tolerances are:		<b>COAST/ACM</b>		
	Fractions ±1/64	Decimals .XX = ±0.03 .XXX = ±0.010	Angles ±1/2°	TITLE <b>Inductor</b>	
	DRAWN BY Jim Allen	DATE 05/24/02	FSCM 22558	DWG. NO 32090X	REV.
DO NOT SCALE DRAWING		SCALE: none	MAX. WT.: 4 grams	SHEET 1 OF 1	