

REVISIONS			
REV.	DESCRIPTION	DATE	BY

Marking

Bag and Tag:
 22558-32313X
 S/N XXX
 D/C

Leads identified with tags.

Classification

MIL-PRF-27 Grade: 6
 MIL-PRF-27 Class: S (130° C)
 Maximum Ambient Temperature: 105° C

MIL-STD-981 Quality Assurance Provisions



Class	Description	Drawing Number ¹
C	Commercial Parts	32313-30
B	Group A Inspection	32313-31B
E	Group A Inspection	32313-31S
S	Group A Inspection	32313-31S and Group B Inspection
		32313-85

¹ The germane data will ship with the hardware.

Electrical Characteristics

DC Resistance: (1 - 2) = 52 mΩ Maximum

Inductance (measured at 0.35 V, 10 KHz):
 (1 - 2) = 1.8 mH Minimum, IDC = 0A

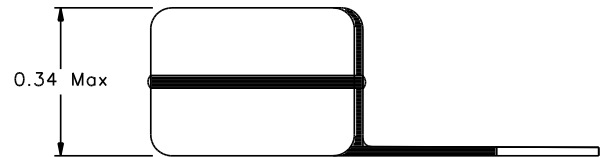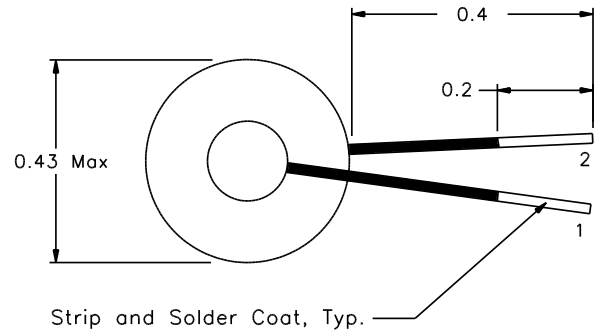

LOAD CONDITIONS	
IDC (1 - 2) = 2.25A	PTOTAL = 0.26 W

These Parts Are Manufactured in Strict Compliance to MIL-STD-981.

The "X" in the part number refers to the Quality Level (C, B, E, or S), see Quality Assurance Provisions above.	UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, and tolerances are: Fractions Decimals Angles ±1/64 .X = ±0.1 ±5° .XX = ±0.02 .XXX = ±0.010		COAST/ACM		
	DRAWN BY DATE Jim Allen 11/07/02		TITLE Inductor, Noise Suppressor		
	DO NOT SCALE DRAWING		FSCM 22558	DWG. NO 32313X	REV.