



REVISIONS			
REV.	DESCRIPTION	DATE	BY

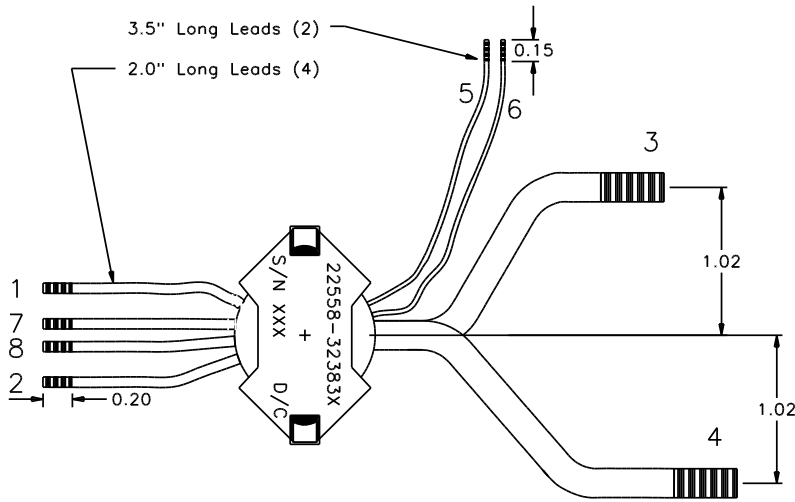

See Sheet 2 for lead 3 & 4 and assembly details.

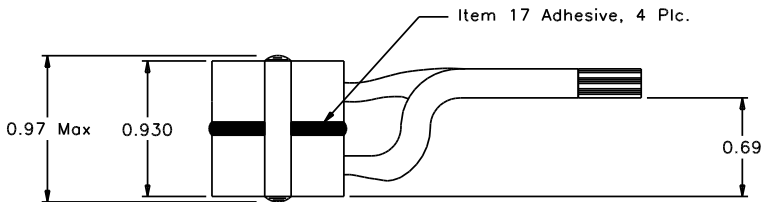

LOAD CONDITIONS
 EPRI = 70 VRMS, 200 kHz
 P(3-4) = 185W P(5-6) = 8W
 P_{TOTAL} = 193W

Classification

MIL-PRF-27 Grade: 6
 MIL-PRF-27 Class: S (130° C)
 Maximum Ambient Temperature: 105° C

MIL-STD-981 Quality Assurance Provisions

Class	Description	Drawing Number
C	Commercial Parts	32383-30
B	Group A Inspection	32383-31B
E	Group A Inspection	32383-31S
S	Group A Inspection	32383-31S and
	Group B Inspection	32383-85

Electrical Characteristics


DC Resistance: (1 - 2) = 15.5 mΩ Maximum
 (7 - 8) = 12.6 mΩ Maximum
 (3 - 4) = 0.55 mΩ Maximum
 (5 - 6) = 36 mΩ Maximum

Inductance (measured at 0.1 V, 10 KHz):
 (1+7 - 2+8) = 375 μH Minimum, I_{DC} = 0 A

Ratio and Polarity
 (3 - 4)/(1+7 - 2+8) = 0.200 ± 0.010
 (5 - 6)/(1+7 - 2+8) = 0.300 ± 0.010

These Parts Are Manufactured in Strict Compliance to MIL-STD-981.

The "X" in the part number refers to the Quality Level (C, B, E, or S), see Quality Assurance Provisions above.	UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, and tolerances are: Fractions Decimals Angles ±1/64 .XX = ±0.03 ±1/2° .XXX = ±0.010		COAST/ACM		
	DRAWN BY DATE Jim Allen 06/06/03		TITLE Power Transformer		
	DO NOT SCALE DRAWING		FSCM 22558	DWG. NO 32383X	REV.
		SCALE: none	MAX. WT.: 90 grams	SHEET 1 OF 2	

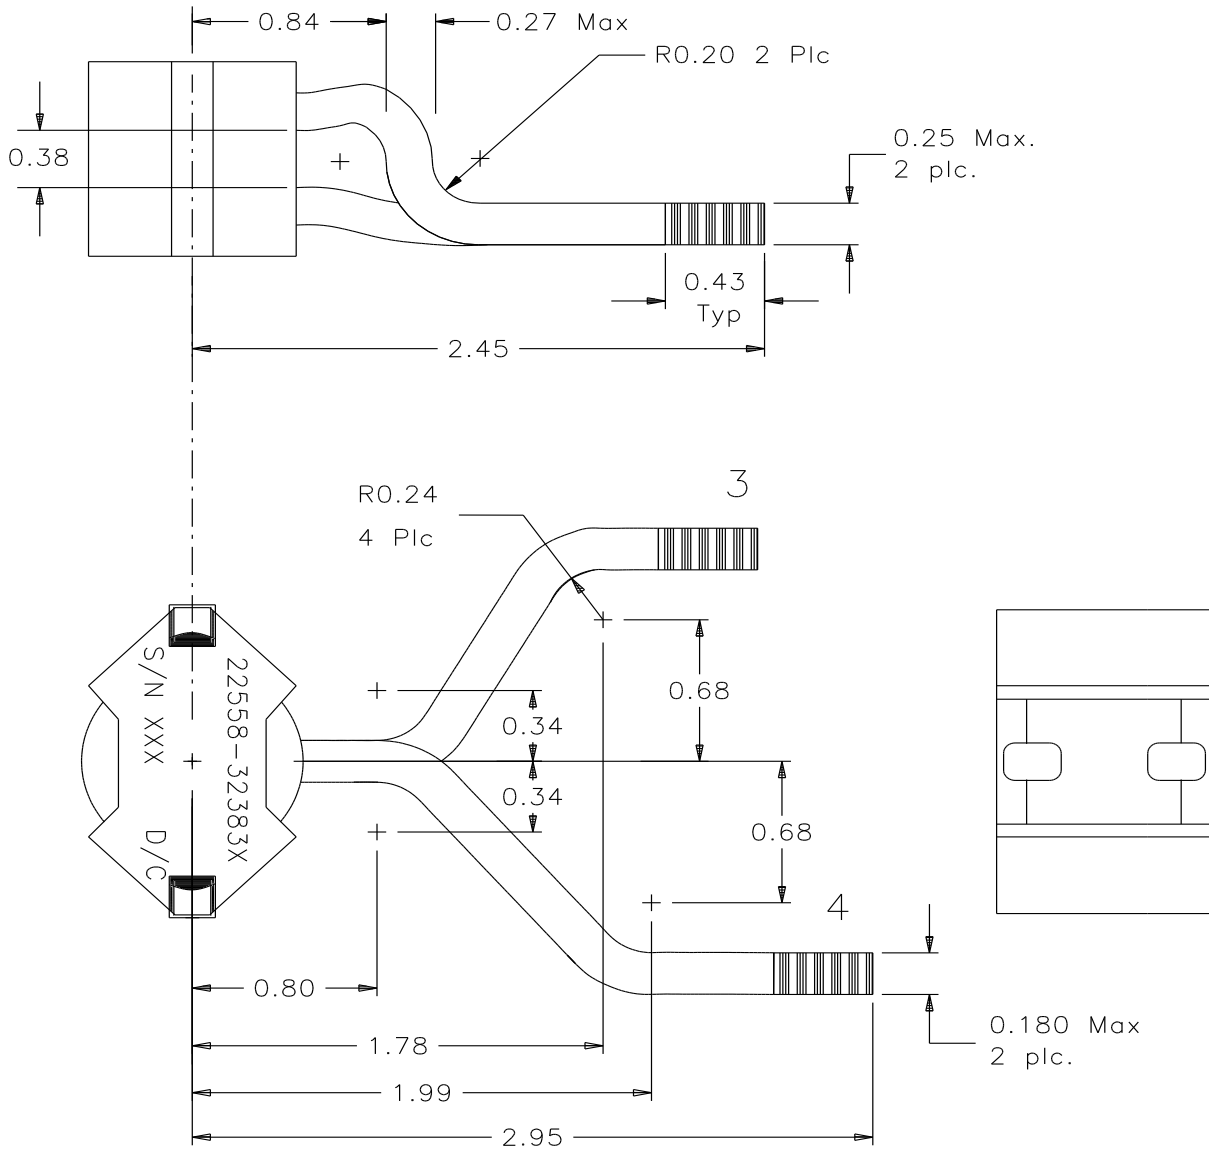

UNLESS OTHERWISE SPECIFIED:
Dimensions are in inches, and
tolerances are:

Fractions ±1/64	Decimals .XX = ±0.03 .XXX = ±0.010	Angles ±5°
--------------------	--	---------------

DRAWN BY

DATE

Jim Allen

06/06/03

COAST/ACM

TITLE

Power Transformer

FSCM

22558

DWG. NO

32383X

DO NOT SCALE DRAWING

SCALE: none

SHEET 2 OF 2