


REVISIONS			
REV.	DESCRIPTION	DATE	BY



Classification

MIL-PRF-27 Grade: 5
 MIL-PRF-27 Class: S (130° C)
 Maximum Ambient Temperature: 105° C

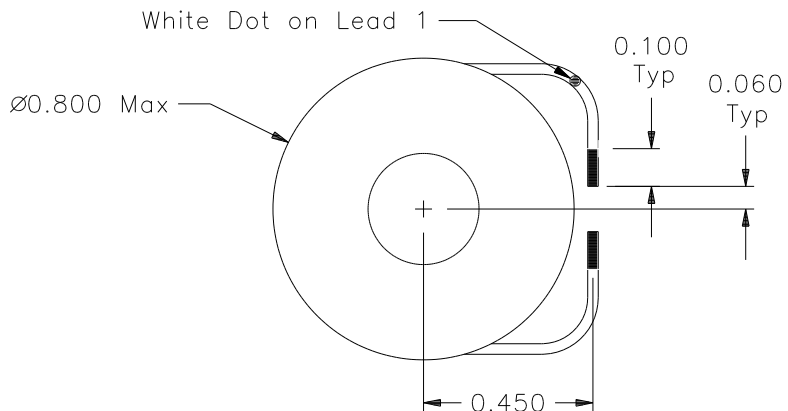

MIL-STD-981 Quality Assurance Provisions

Class	Description	Drawing Number ¹
C	Commercial Parts	32349-30
B	Group A Inspection	32349-31B
E	Group A Inspection	32349-31S
S	Group A Inspection	32349-31S and
	Group B Inspection	32349-85

¹ The germane data will ship with the hardware.

LOAD CONDITIONS		
Terminals	I_{DC}	$P = I^2R$
1 - 2	1.1 A	0.36 W

Electrical Characteristics

DC Resistance: (1 - 2) = 300 mΩ Maximum

Inductance (measured at 1.0V, 10 KHz):

(1 - 2) = 573 μH ± 10%, $I_{DC} = 0$

(1 - 2) = 450 μH Minimum, $I_{DC} = 1.1A$

These Parts Are Manufactured in Strict Compliance to MIL-STD-981.

The "X" in the part number refers to the Quality Level (C, B, E or S), see Quality Assurance Provisions above.	UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, and tolerances are:		COAST/ACM		
	Fractions	Decimals	Angles	TITLE	
	±1/64	.X = ±0.1 .XX = ±0.03 .XXX = ±0.010	±1/2°	Inductor	
	DRAWN BY	DATE	FSCM	DWG. NO	REV.
	Jim Allen	03/21/03	22558	32349X	
DO NOT SCALE DRAWING			SCALE: none	MAX. WT.: 20 grams	SHEET 1 OF 1