


REVISIONS			
REV.	DESCRIPTION	DATE	BY

Mark on Top:
 White dot for Pin 1
 22558-31669X
 S/N XXX
 Date Code

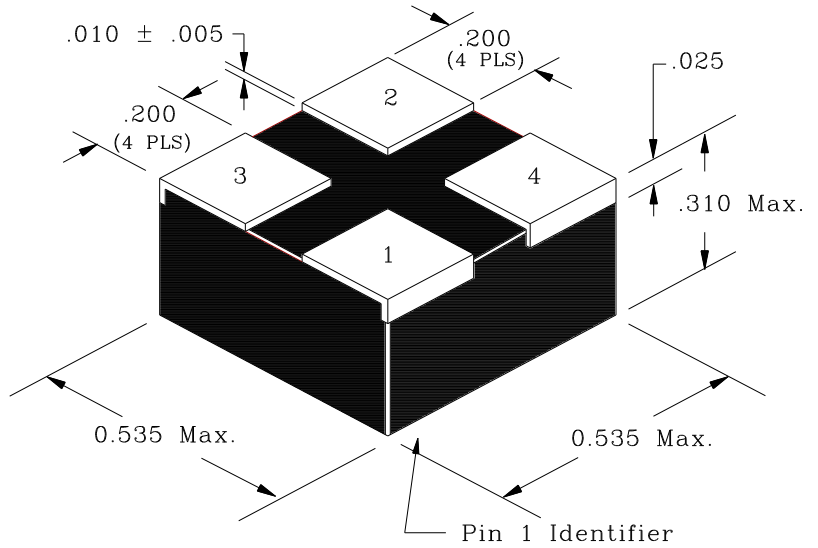

Coplanarity pad to pad is 0.003 max. (by design only, prior to solder coating, not inspectible).

Classification

MIL-PRF-27 Grade: 5
 MIL-PRF-27 Class: S (130° C)
 Maximum Ambient Temperature: 105° C

MIL-STD-981 Quality Assurance Provisions

Class	Description	Drawing Number
C	Commercial Parts	31669-30
B	Group A Inspection	31669-31B
E	Group A Inspection	31669-31S
S	Group A Inspection	31669-31S and
	Group B Inspection	31669-85

LOAD CONDITIONS

IDC (1+3 - 2+4) = 13.5A P_{TOTAL} = 0.33W

Electrical Characteristics

DC Resistance (1 - 2) = 3.6 mΩ Maximum
 (3 - 4) = 3.6 mΩ Maximum
 Inductance (measured at 0.1 V, 10 KHz):
 (1+3 - 2+4) = 1.09 μH +40%/-20%, I_{DC} = 0 A
 (1+3 - 2+4) = 0.68 μH Minimum, I_{DC} = 13.5 A

These Parts Are Manufactured in Strict Compliance to MIL-STD-981.

The "X" in the part number refers to the Quality Level (C, B, E, or S), see Quality Assurance Provisions above.	UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, and tolerances are:		COAST/ACM		
	Fractions ±1/64	Decimals .XX = ±0.03 .XXX = ±0.010	Angles ±1/2°	TITLE Inductor	
	DRAWN BY Jim Allen	DATE 05/24/02	FSCM 22558	DWG. NO 31669X	REV.
DO NOT SCALE DRAWING			SCALE: none	MAX. WT.: 4 grams	SHEET 1 OF 1