
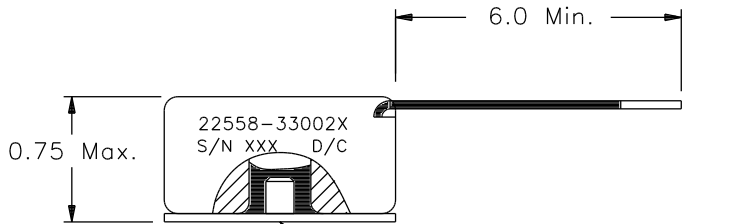


REVISIONS			
REV.	DESCRIPTION	DATE	BY

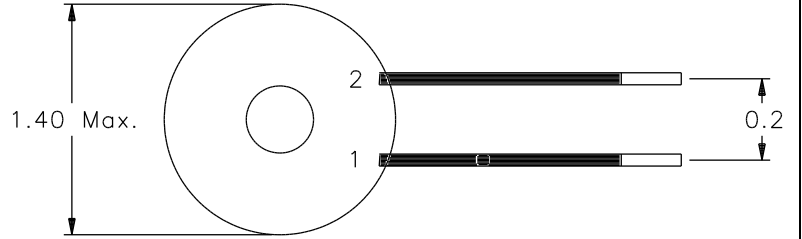

1/32 EG Mounting Base
With 4-40 AL Insert,
5 Full Thds, Min.

Classification

MIL-PRF-27 Grade: 6
MIL-PRF-27 Class: S (130° C)
Maximum Ambient Temperature: 105° C

MIL-STD-981 Quality Assurance Provisions

Class	Description	Drawing Number ¹
C	Commercial Parts	33002-30
B	Group A Inspection	33002-31B
E	Group A Inspection	33002-31S
S	Group A Inspection Group B Inspection	33002-31S and 33002-85

¹ The germane data will ship with the hardware.

LOAD CONDITIONS

IDC (1 - 2) = 2.8A P_{TOTAL} = 0.557 W

Electrical Characteristics

DC Resistance: (1 - 2) = 71 mΩ Maximum

Inductance (measured at 0.5 V, 10 KHz):

(1 - 2) = 1.1 mH ±10%, IDC = 0A

(1 - 2) = 363 μH Min., IDC = 2.7 A

These Parts Are Manufactured in Strict Compliance to MIL-STD-981.

The "X" in the part number refers to the Quality Level (C, B, E, or S), see Quality Assurance Provisions above.	UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, and tolerances are:		COAST/ACM		
	Fractions	Decimals	Angles	TITLE	
	±1/64	.X = ±0.1 .XX = ±0.02 .XXX = ±0.010	±5°	Inductor	
	DRAWN BY	DATE	FSCM	DWG. NO	REV.
	Jim Allen	08/07/03	22558	33002X	
DO NOT SCALE DRAWING			SCALE: none	MAX. WT.: 70 grams	SHEET 1 OF 1