



CTS Series

Current Transformer (Square Package)

MIL-PRF-27
QPL Approved

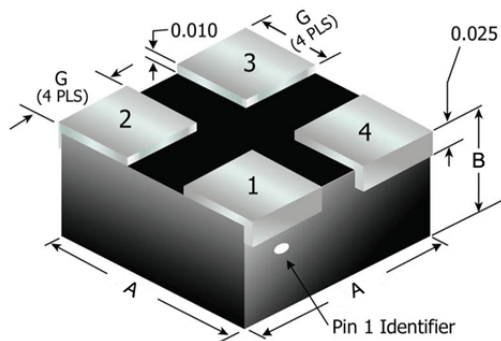

Physical Parameters				
Dim	CTS100	CTS200	CTS300	CTS400
A	0.250 ± .010	0.400 ± .010	0.400 ± .010	0.525 ± .010
B	.230 Max	.230 Max	.310 Max	.310 Max
G	.085	.135	.135	.200
WT	0.6 g	1.5 g	2.8 g	4.1 g

Tape & Reel (additional charge)		
Package	Small Reel (Qty)	Large Reel (Qty)
CTS100	300	1000
CTS200	200	650
CTS300	200	650
CTS400	125	300

FEATURES

- Leadless device for minimum footprint
- Low EMI Radiation
- Low Thermal Expansion permits mounting on most substrate materials

SPECIFICATIONS

- Operating temperature range: -55°C to 125°C
- Temperature rise at rated DC current is less than 30°C
- Inductance tested at 10 kHz
- Dielectric Withstanding Voltage: 500 VAC
- Moisture, Shock, and Immersion Resistant
- Resistance to Soldering Heat: 265°C for 10 sec
- Terminations: 90/10 Tin/Lead Plating
- Welded Connections, Transfer Molded Package
- Space Application: Available to MIL-STD-981

Part Number	Current Peak Max (A)	Volt-Sec Min (v-μsec)	DCR Max (Ω)	Inductance Reference (mH)	Turns Ratio
CTS100 Series					
CTS101	5	20	0.85	2.80	1 : 50
CTS102	5	20	1.20	5.70	1 : 100
CTS103	5	40	5.60	23.00	1 : 200
CTS200 Series					
CTS201	10	40	1.20	4.40	1 : 50
CTS202	10	40	1.50	8.90	1 : 100
CTS300 Series					
CTS301	20	40	1.20	4.40	1 : 50
CTS302	10	80	7.90	35.00	1 : 200
CTS400 Series					
CTS401	20	144	2.90	21.00	1 : 100
CTS402	20	288	6.00	85.00	1 : 200



Coast / Advanced Chip Magnetics
4225 Spencer Street, Torrance CA 90503 · Phone 310-370-8188 · Fax 310-370-8388
Web: www.coastacm.com · Email: sales@coastacm.com