
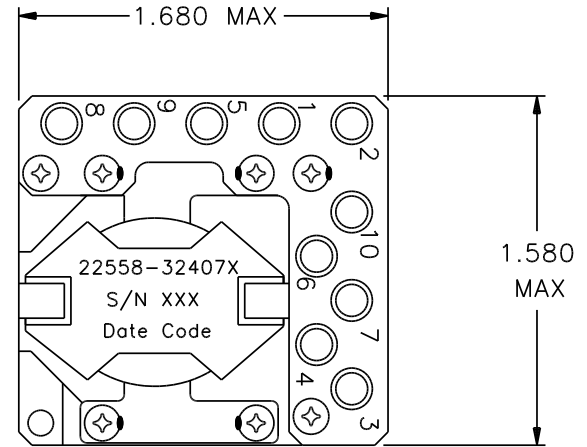


REVISIONS			
REV.	DESCRIPTION	DATE	BY

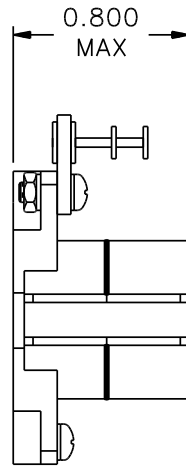

**Classification**

MIL-PRF-27 Grade: 6  
 MIL-PRF-27 Class: S (130° C)  
 Maximum Ambient Temperature: 105° C

**MIL-STD-981 Quality Assurance Provisions**

Class	Description	Drawing Number <sup>1</sup>
C	Commercial Parts	32407-30
B	Group A Inspection	32407-31B
E	Group A Inspection	32407-31S
S	Group A Inspection	32407-31S and
	Group B Inspection	32407-85

<sup>1</sup> The germane data will ship with the hardware.

**LOAD CONDITIONS**

Terminals	IDC A	P = I <sup>2</sup> R W
1 - 2	5.3	0.168
3 - 4	5.9	0.191
5 - 6	2.8	0.022
7 - 8	1.7	0.087
9 - 10	0.2	0.004
		P <sub>TOTAL</sub> = 0.47 W

**Electrical Characteristics**

DC Resistance: (1 - 2) = 6.0 mΩ (7 - 8) = 30 mΩ  
 (Maximum) (3 - 4) = 5.5 mΩ (9 - 10) = 90 mΩ  
 (5 - 6) = 2.8 mΩ

Inductance (measured at 0.1V, 10 KHz):

(1 - 2) = 9.0 μH ± 10% IDC = 0  
 (1 - 2) = 7.7 μH Minimum, IDC = 5.0 A

Ratio and Polarity: (Ratios are verified with un-gapped core prior to assembly)

1 - 2/9 - 10 = 0.400 Nominal  
 3 - 4/9 - 10 = 0.400 Nominal  
 5 - 6/9 - 10 = 0.133 Nominal  
 7 - 8/9 - 10 = 0.500 Nominal

**These Parts Are Manufactured in Strict Compliance to MIL-STD-981.**

The "X" in the part number refers to the Quality Level (C, B, E or S), see Quality Assurance Provisions above.	UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, and tolerances are:		<b>COAST/ACM</b>		
	Fractions	Decimals	Angles	TITLE	
	±1/64	.X = ±0.1 .XX = ±0.03 .XXX = ±0.010	±1/2°	<b>Coupled Inductor</b>	
	DRAWN BY	DATE	FSCM	DWG. NO	REV.
DO NOT SCALE DRAWING	Jim Allen	10/03/03	22558	32407X	
		SCALE: none	MAX. WT.: 65 grams	SHEET 1 OF 1	